

# M42SH47-Txx


HIGH TORQUE Bipolar Stepping motor - 1,8°



## Introduction

The M42SH47-Txx is a bipolar stepper motor with terminal-box, optionally equipped with a Push-Pull or Line-Driver incremental encoder.



The connection of the motor and the ecoder is made through M12 circular connectors.

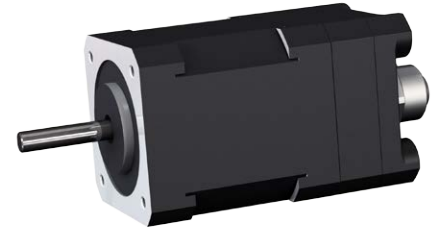


## Specifications

Model	Current/ phase	Resistance/ phase	Inductance/ phase	Detent torque	Holding torque	Rotor inertia	Encoder	Weight
M42SH47-T-C	1,68A	1,65 $\Omega$	2,8 mH	21 mNm	0,44 Nm	68 gcm <sup>2</sup>	-	360g
M42SH47-TO0512P24C	1,68A	1,65 $\Omega$	2,8 mH	21 mNm	0,44 Nm	68 gcm <sup>2</sup>	Push-pull	370g
M42SH47-TO0512L05C	1,68A	1,65 $\Omega$	2,8 mH	21 mNm	0,44 Nm	68 gcm <sup>2</sup>	Line-driver	370g

## Mechanical dimensions

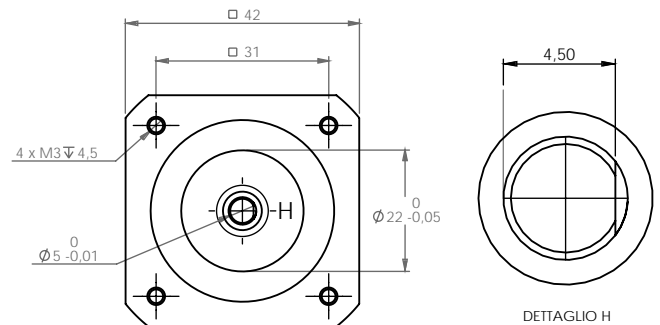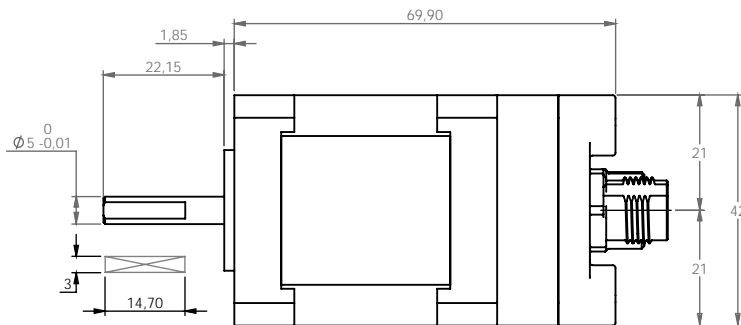

## Speed vs Torque curve

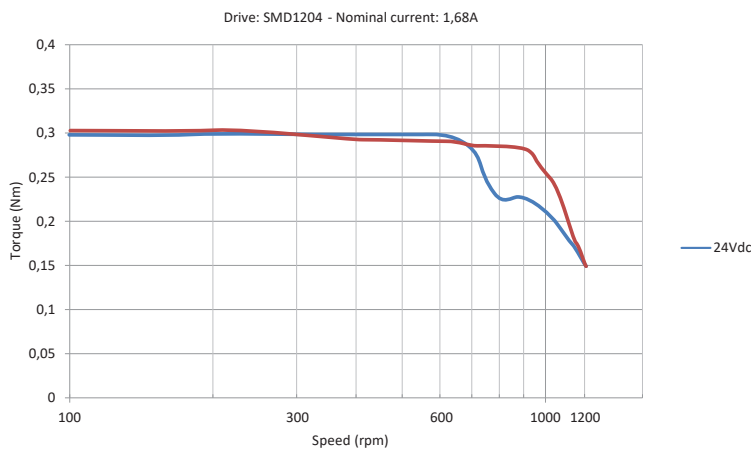

The torque curves are made with AEP torque transducer mod. MRT250NM

## Motor characteristics

Step Angle	1,8° ± 5%
Insulation Class	B
Ambient Temperature	-10 °C .. +35 °C
Temperature Rise	80°C max (2 phase ON)
Insulation Resistance	100 M $\Omega$ min 500Vdc
Dielectric Strength	500 VAC FOR ONE MINUTE
Shaft Radial Play	0,02mm (with 400g load)
Shaft Axial Play	0,08mm (with 400g load)
Max Radial Force	28N (20mm FROM FRONT FLANGE)
Max Axial Force	10 N

## Caution

Insert and tighten firmly the connectors before powering the motor. **Never disconnect any connector when powered.** Installation and maintenance must be carried out by qualified technicians only. The operator must have detailed information to be able to carry out this work.


- Unexpected dangers may be encountered
- An incorrect use may destroy this product and the connected equipments.

# M42SH47-Txx

HIGH TORQUE Bipolar Stepping motor - 1,8°



## Connectors layout

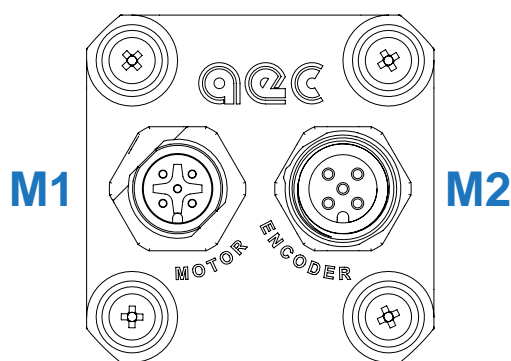

## Encoder characteristics

	PUSH-PULL	LINE DRIVER
V <sub>SUPPLY</sub>	+24 V <sub>DC</sub>	+5 V <sub>DC</sub>
I <sub>MAX</sub> (NO LOAD)	80 mA	
I <sub>MAX</sub>	60 mA each channel	
F <sub>OUT</sub> MAX	300 KHz	
COUNT/REV	512	
PROTECTION DEGREE	IP54	
WORKING TEMPERATURE	-20 .. +80 °C	

## Motor connector

M1	M12 5 Pin male		PIN	Description	Cable color matching	
			1	Phase A -	BROWN	
			2	Phase A	WHITE	
			3	Phase B -	BLUE	
			4	Phase B	BLACK	
			5	Shield	GREY	

## Push-Pull encoder connector

M2	M12 5 Pin female		PIN	Description	Cable color matching	
			1	V <sub>IN</sub> (+24V <sub>DC</sub> )	BROWN	
			2	Channel A	WHITE	
			3	Common	BLUE	
			4	Channel B	BLACK	
			5	Channel Z	GREY	

## Line-Driver encoder connector

M2	M12 8 Pin male		PIN	Description	Cable color matching	
			1	Channel Z +	WHITE	
			2	V <sub>IN</sub> (+5V <sub>DC</sub> )	BROWN	
			3	Channel A +	GREEN	
			4	Channel A -	YELLOW	
			5	Channel B +	GREY	
			6	Channel B -	PINK	
			7	Common	BLUE	
			8	Channel Z -	RED	

## Ordering code

