

# EB23-063-063-D-C

## ELECTRO-MAGNETIC BRAKE



RoHS

### NEMA23 electro-magnetic brake


The EB23 is an negative single disc electromagnetic brake, closed by a spring mechanism and equipped with NEMA 23 flange for an easy and quick mounting. It is used for a dry run as an holding brake.

Characteristics		U.M.	EB24
Braking torque		Nm	1,5
Max output torque (Nm)		Nm	5
Max axial force (Fa)		N	5
Max radial force (Fr)		N	5
Tripping time	Insertion	ms	10
	Disinsertion	ms	21
Maximum speed		RPM	3000
Inertia		gcm <sup>2</sup>	9
Operating temperature range		°C	-10 .. +90
Ambient temperature range		°C	-10 .. +50
Humidity range (no condensation)		%HR	95% or less
Weight		g	750
Supply		V <sub>dc</sub>	24
Power		W	15
Freewheeling diode	Integrated in the connector (only mod. EB23-063-063-D-C)		



**CAUTION:** the EB23 is an holding brake. It must be activated only when the motor is already stopped.

### Mechanical dimensions

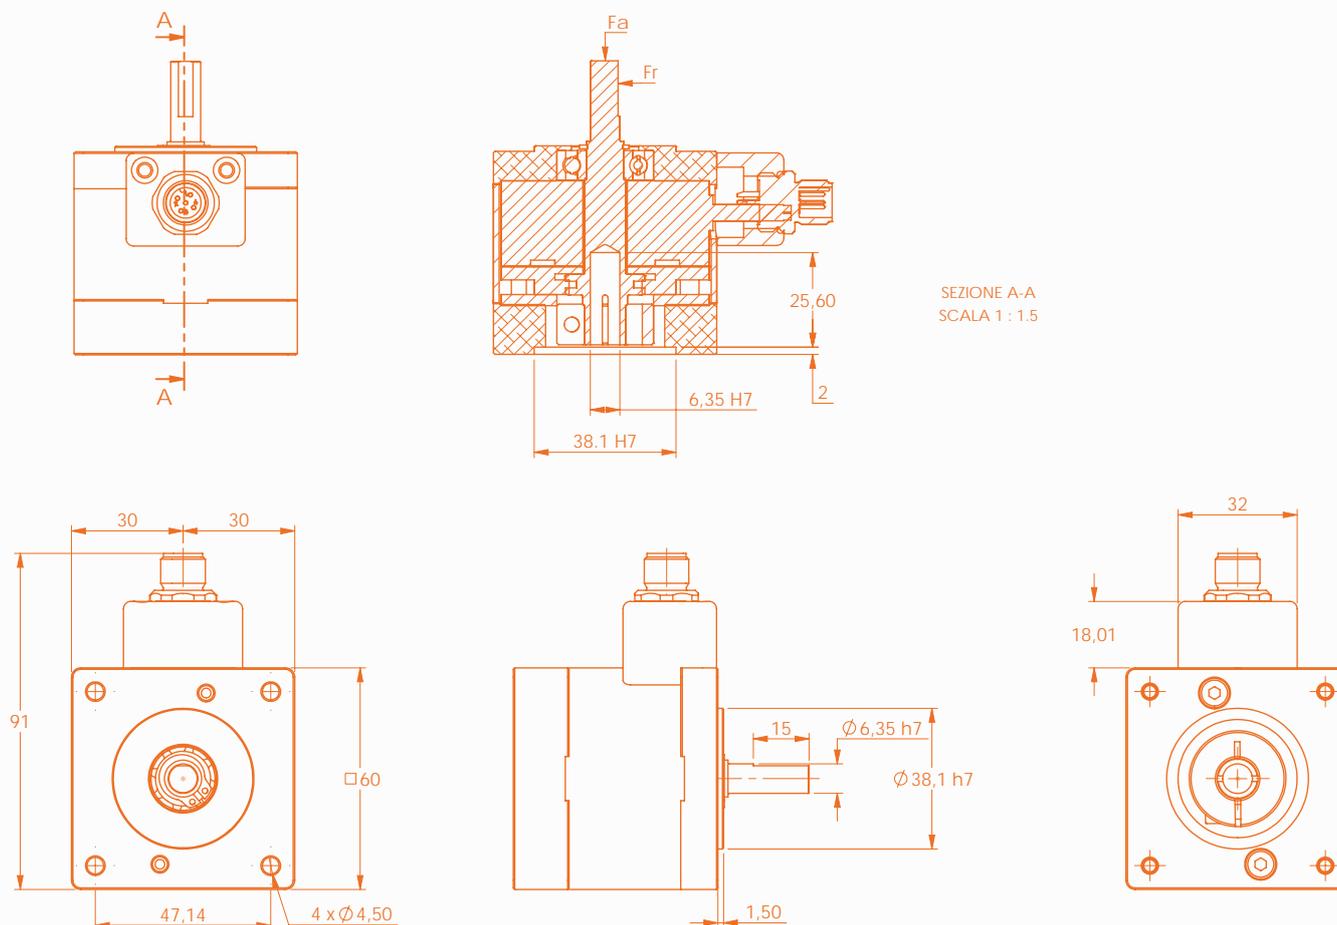


Technical alteration reserved. Specification subject to change without notice. All rights reserved

# EB23-063-063-D-C


## ELECTRO-MAGNETIC BRAKE



### Mounting example

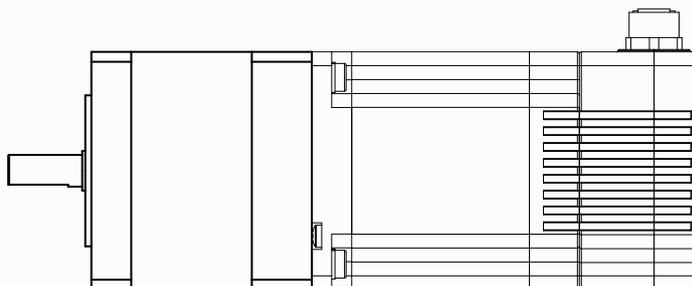


### M12 5 pins male connector

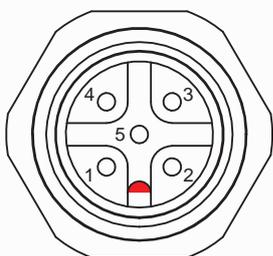

PIN	Description
1	+24 Vdc
2	N.C.
3	GND common
4	N.C.
5	N.C.

### Cable wiring

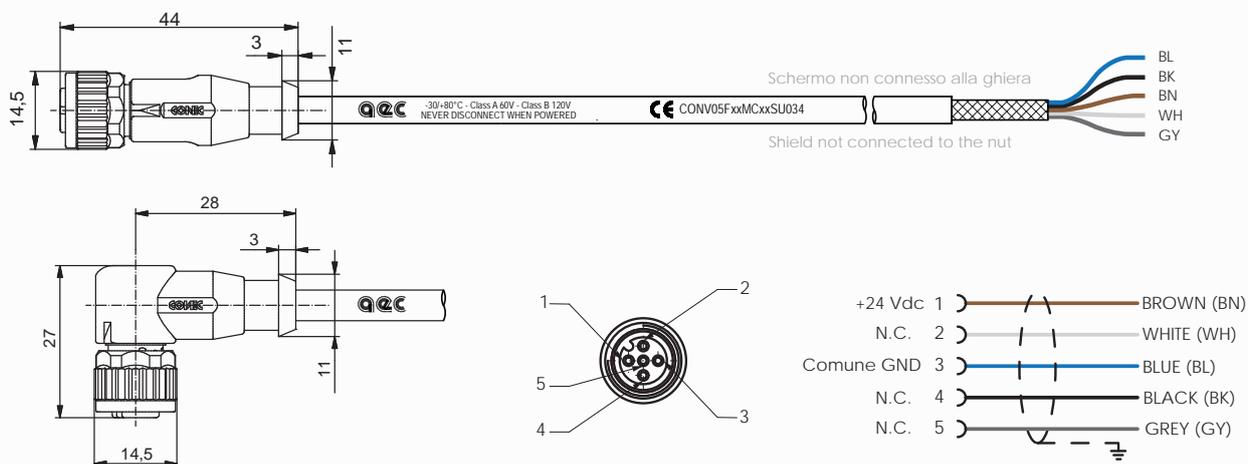

### ONLY FOR CODE EB23-063-063-C



**CAUTION:** When the voltage to the coil is switched off, some overvoltages may be generated and may result in damages to other electronic devices.

**ALWAYS** apply a freewheeling diode (1N4007 or similar) between the +24Vdc voltage and the common.

During wiring, pay attention to the polarity of the power supply. An inversion of the polarity may result in damages to the equipment.

