

M86SH118-Txx

HIGH TORQUE Bipolar Stepping motor - 1,8°



Introduction

The M86SH118-Txx is a bipolar stepper motor with terminal-box, optionally equipped with a Push-Pull or Line-Driver incremental encoder.

The connection of the motor is made through a 7/8" circular connector, and the connection of the ecoder is made through a M12 circular connector.

Phase A

Phase \bar{A}

Phase B




Phase \bar{B}




Specifications

Model	Current/ phase	Resistance/ phase	Inductance/ phase	Detent torque	Holding torque	Rotor inertia	Encoder	Weight
M86SH118-T-C	6 A	0,45 Ω	5.1 mH	230 mNm	8,7 Nm	2700 gcm ²	-	3,8 Kg
M86SH118-TO0512P24C	6 A	0,45 Ω	5.1 mH	230 mNm	8,7 Nm	2700 gcm ²	Push-pull	3,8 Kg
M86SH118-TO0512L05C	6 A	0,45 Ω	5.1 mH	230 mNm	8,7 Nm	2700 gcm ²	Line-driver	3,8 Kg

Mechanical dimensions

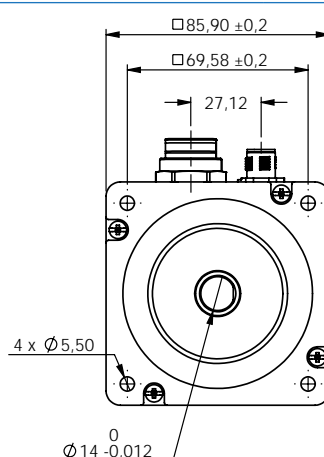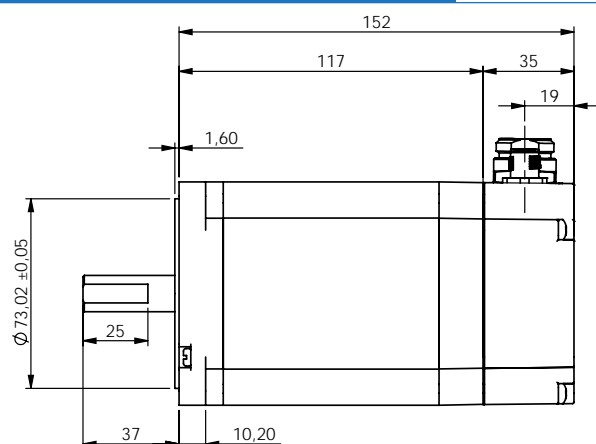

Speed vs Torque curve

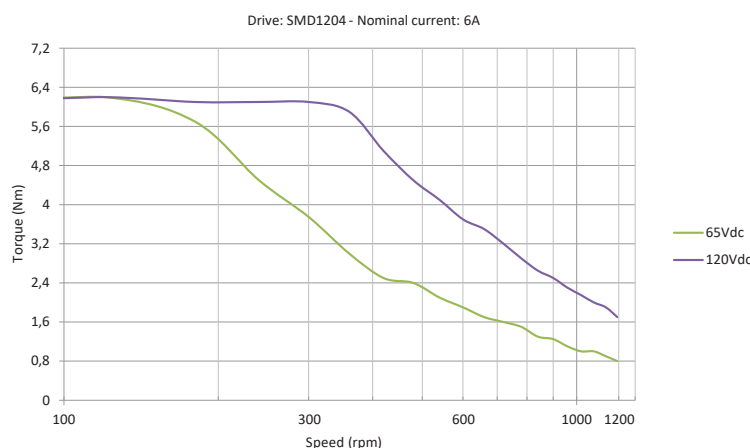

Motor characteristics

Step Angle	1,8° ± 5%
Insulation Class	B
Ambient Temperature	-20 °C .. +50 °C
Temperature Rise	80°C max (2 phase ON)
Insulation Resistance	100 M Ω min 500Vdc
Dielectric Strength	820 VAC FOR ONE MINUTE
Shaft Radial Play	0,02mm (con 450g load)
Shaft Axial Play	0,08mm (con 450g load)
Max Radial Force	220N (20mm FROM FRONT FLANGE)
Max Axial Force	60 N

Caution

Insert and tighten firmly the connectors before powering the motor. **Never disconnect any connector when powered.** Installation and maintenance must be carried out by qualified technicians only. The operator must have detailed information to be able to carry out this work.


- Unexpected dangers may be encountered
- An incorrect use may destroy this product and the connected equipments.

M86SH118-Txx

HIGH TORQUE Bipolar Stepping motor - 1,8°



Connectors layout

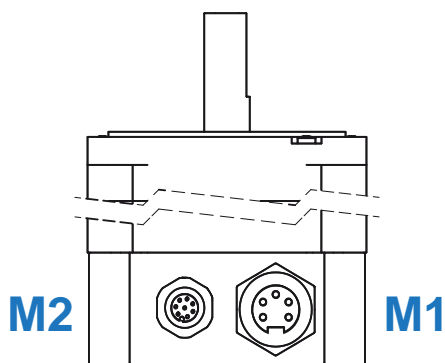


Encoder characteristics

	PUSH-PULL	LINE DRIVER
V _{SUPPLY}	+24 V _{DC}	+5 V _{DC}
I _{MAX} (NO LOAD)	80 mA	
I _{MAX}	60 mA each channel	
F _{OUT} MAX	300 KHz	
COUNT/REV	512	
PROTECTION DEGREE	IP54	
WORKING TEMPERATURE	-20 .. +80 °C	

Motor connector


M1 7/8 5 Pin male



PIN	Description	Cable color matching	
1	Phase A	BLACK	
2	Phase A -	BLUE	
3	GND	YELLOW/GREEN	
4	Phase B	BROWN	
5	Phase B -	WHITE	

Push-Pull encoder connector


M2 M12 5 Pin female



PIN	Description	Cable color matching	
1	V _{IN} (+24V _{DC})	BROWN	
2	Channel A	WHITE	
3	Common	BLUE	
4	Channel B	BLACK	
5	Channel Z	GREY	

Line-Driver encoder connector

M2 M12 8 Pin male



PIN	Description	Cable color matching	
1	Channel Z +	WHITE	
2	V _{IN} (+5V _{DC})	BROWN	
3	Channel A +	GREEN	
4	Channel A -	YELLOW	
5	Channel B +	GREY	
6	Channel B -	PINK	
7	Common	BLUE	
8	Channel Z -	RED	

Ordering code

