

EB24-080-080-D-C

ELECTRO-MAGNETIC BRAKE




RoHS

NEMA24 electro-magnetic brake



The EB24 is an negative single disc electromagnetic brake, closed by a spring mechanism and equipped with NEMA 24 flange for an easy and quick mounting. It is used for a dry run as an holding brake.

Characteristics		U.M.	EB24
Braking torque		Nm	1,5
Max output torque (Nm)		Nm	5
Max axial force (Fa)		N	5
Max radial force (Fr)		N	5
Tripping time	Insertion	ms	10
	Disinsertion	ms	21
Maximum speed		RPM	3000
Inertia		gcm ²	9
Operating temperature range		°C	-10 .. +90
Ambient temperature range		°C	-10 .. +50
Humidity range (no condensation)		%HR	95% or less
Weight		g	750
Supply		V _{dc}	24
Power		W	15
Freewheeling diode	Integrated in the connector (only mod. EB24-080-080-D-C)		



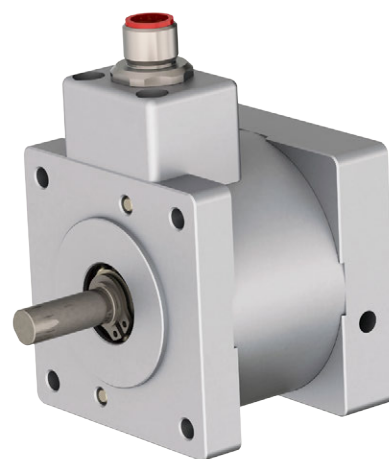


CAUTION: the EB24 is an holding brake. It must be activated only when the motor is already stopped.

Mechanical dimensions

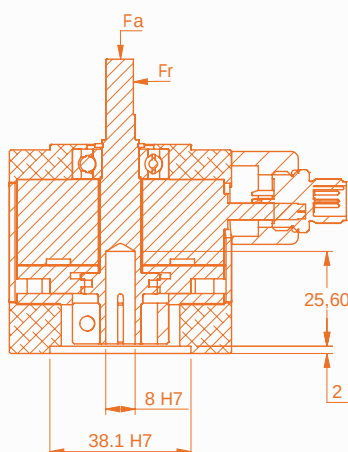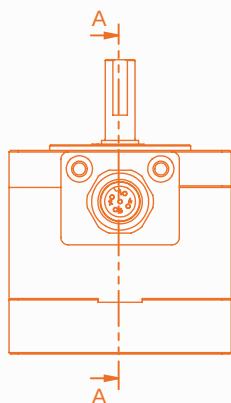

SEZIONE A-A
SCALA 1 : 1.5

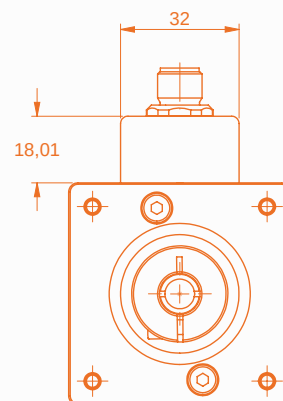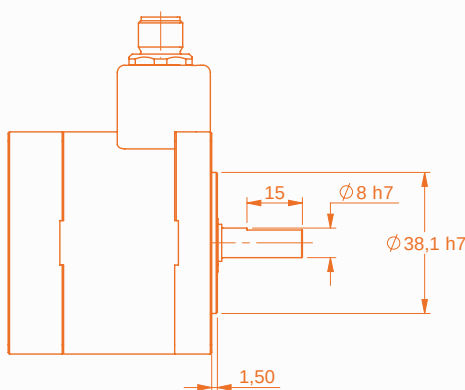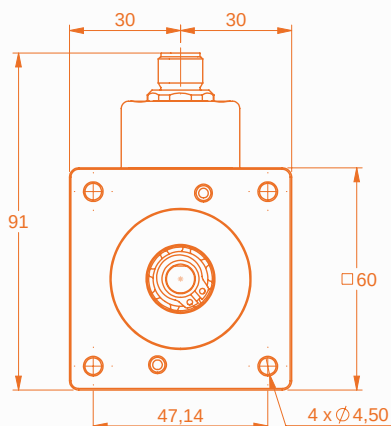


EB24-080-080-D-C


ELECTRO-MAGNETIC BRAKE



Mounting example

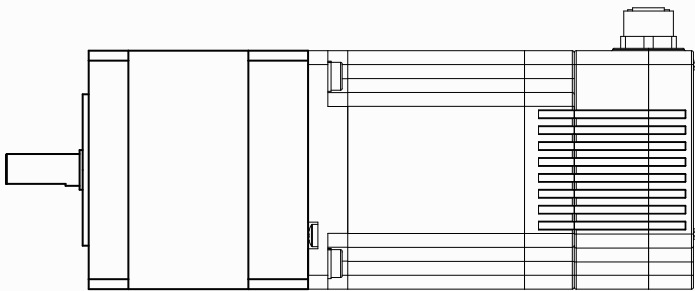


M12 5 pins male connector

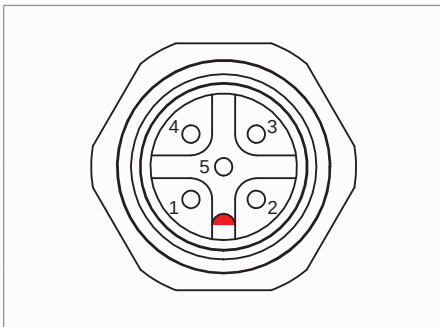

PIN	Description
1	+24 Vdc
2	N.C.
3	GND common
4	N.C.
5	N.C.

Cable wiring

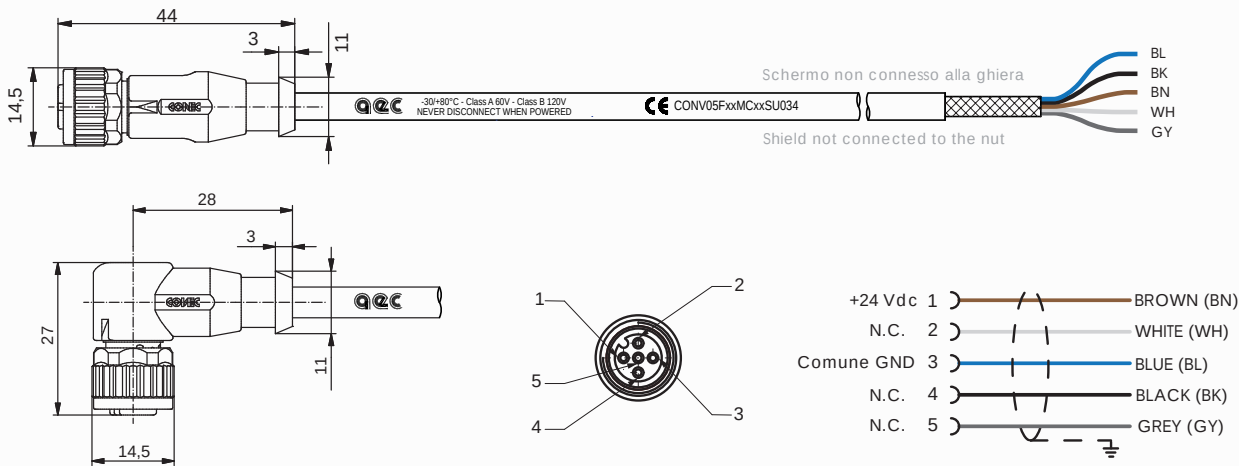

ONLY FOR CODE EB34-140-140-C



CAUTION: When the voltage to the coil is switched off, some overvoltages may be generated and may result in damages to other electronic devices.

ALWAYS apply a freewheeling diode (1N4007 or similar) between the +24Vdc voltage and the common.

During wiring, pay attention to the polarity of the power supply. An inversion of the polarity may result in damages to the equipment.

